



Specialty, Service, Unite, Dedicate



Specialty, Service, Unite, Dedicate

B1 温州汉邦电子有限公司
Wenzhou Hanbang Electronic Co.,Ltd

Service Call : 0086-577-59396666

Fax : 0086-577-85398666

Website : <http://www.wzzbdz.com/en> Post Code:325000

Add: No.19 Fengfang Road,Ouhai Economic Development Zone, Wenzhou, Zhejiang, China.





Welding Tools

- 1~4 Soldering Station
- 5~9 Iron Head
- 10~11 Soldering Station Handle
- 12 Station Heater, Handle
- 13~17 Thermostat Iron
- 18 Plastic Welding Gun
- 19 Multipurpose Hot Melt Glue Gun

Electrical Tools

- 20~22 Electric Screwdriver
- 23 Automatic Screw Feeder
- 24~26 Balancer
- 27 Electric Screwdriver Power Supply
- 28 Electric Screwdriver Socket
- 29 Pliers

Hand Tools

- 30 Industrial Grade Electronic Scissors
- 31 Multi-functional Wire Stripping Pliers
- 32 Welding Tools
- 33~34 Solder Sucker

Other Tools

- 35 High Temperature Insulation Pad
- 36 Solder Iron Nozzle Cleaner
- 37 Antistatic Wrist Strap

936/938A Series Constant Temperature Soldering Station



SS-936A/B

SS-938A

>> PRODUCT FEATURES

- Adopt plug – in ceramic heater design, easy to replace;
- Black gold iron resistance, easy to cover the tin, not easy to oxidize, long service life;
- Microcomputer chip control is used in the main engine, and the temperature is rising rapidly.
- High power transformer design, output power reaches 60W;
- Anti-static design, the triangle power plug



Application Welding Display

>> PRODUCT PARAMETERS

Product Model	SS-936A	SS-936B	SS-938A(Digital Display)
Input Voltage	220VAC ± 10%50HZ		
Output Voltage	24V		
Power Consumption	60W		
Temperature Control Range	200℃~500℃	200℃~480℃	200℃~500℃
Set Mode	Knob Tempering	Knob Tempering	Push-button Thermostat
Display Mode	Dial	Dial	Display
Wire Material	The silicone Line	PVC Wire	The Silicone Line
Welding Head	Black Gold	Alloy	Black Gold
Soldering Station Size	140*110*90mm(L*W*H)		
Soldering Iron Handle	SS-907	SS-906	SS-907
Welding Head	900/936/936G Series Soldering Iron Head		
Heater	D1321 Core		

HANBANG 850/8502 Series Hot Wind Rework Soldering Station



SS-850

SS-850D



SS-8502

SS-8502D

>> PRODUCT FEATURES

- Anti - static design, precise temperature adjustment knob.
- Controlled by sensor closed loop PID, without grade wind adjustment , heating up quickly, accurate and stable temperature ,remove welding QFP, PLCC, SOP, BGA and other temperature sensitive components safely.
- Intelligent cooling system. After shutdown, the air supply is delayed and the air pump is automatically closed after the wind temperature is less than 100degree.
- High quality long service life heating materials and advanced processing technology, long service life.
- The soldering iron handle is made of high temperature resistant silicone material, fire prevention, burning prevention and corrosion prevention.

>> PRODUCT DISPLAY



Diaphragm Type Air Pump



High Temperature Resistant Silicone Wire Handle



Application Welding Display



Internal Structure Drawing



Nickel-chrome Wire Wind Gun Heating Core



Ceramic Soldering Iron Heater

>> PRODUCT PARAMETERS

Product name	Desoldering Station		Two - in - one Desoldering Station	
	SS-850	SS-850D	SS-8502	SS-8502D
Product model	SS-850	SS-850D	SS-8502	SS-8502D
Input power	AC220V 50HZ			
Air pressure gun power	700w			
Pump type	Diaphragm			
Air volume	24L/min			
Wind gun heater	Nickel-chrome Wire Heating Core (SS-850H)			
Air gun temperature control range	100℃-480℃			
Air gun handle specification	SS-802			
Specification of soldering iron handle	NO		SS-907	
Display mode	Calibration	Digital display	Calibration	Digital display
Soldering iron power	NO		60W	
Soldering iron temperature control range	NO		200℃-480℃	
Soldering iron heater	NO		B1321 Heater	
Solder type	NO		900/936/936G Series Soldering Iron Head	
Size	247mm*160mm*138mm		237mm*185mm*138mm	
Weight	3.2kg	3.2kg	4.6kg	4.6kg

203H/205H Series High Frequency Soldering Station



SS-203H



SS-205H

>> PRODUCT FEATURES

- Anti-static design, soldering iron head, sensor, heating body design;
- Front design of mouth sensor, accurate temperature control, quick return temperature;
- Plug-in wire heating core, easy to replace, long service life;
- Have automatic dormancy function, save energy;
- Temperature locking function to ensure welding process;
- Digital temperature calibration, easy to operate;
- Password lock function, lock common temperature, convenient and quick use.



Application Welding Display

>> PRODUCT PARAMETERS

Model	SS-203H	SS-205H
Power	90W	150W
Input Voltage	220V 50HZ	
Output Voltage	36V 400KHZ	
Temperature Range	200-600°C	
Soldering station Size	155*130*100mm	197*130*100mm
Soldering Iron	SS-203S Handle	SS-205S Handle
Soldering Iron Head and Grounding Resistance	< 2 Ω	
Soldering Iron Head and Ground Potential	< 2mv	
Heating Principle	High Frequency Eddy Current	
Handle Wire Length	1.1m	1.9m
Specification of Soldering Iron Head	200 Series Soldering Iron Head	500 Series Soldering Iron Head
Heater Core Specification	SS-203PH Plug-in Heating Core	SS-205PH Plug-in Heating Core

936 Series Soldering Iron Head

>> PRODUCT FEATURES


- High quality anaerobic copper material, precise size, fast heat conduction;
- Easy to cover the tin, stable performance, smooth solder joints;
- Advanced nano-coating technology, anti-corrosion and oxidation resistance;
- Special processing, suitable for lead-free soldering;
- Suitable for most 936 series soldering iron or welding table.




936 Series Soldering Iron Head

>> PRODUCT SIZE


Soldering Iron Head Outside Diameter: $\phi 6.5$ Inner Diameter: $\phi 4.3$ Unit: mm
Packing Specification: 100 pcs/box or 10 pcs/box

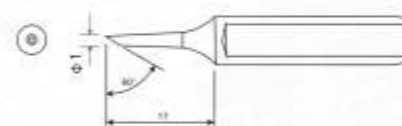


ST-936G-1C

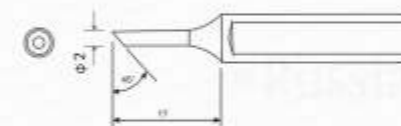


ST-936G-2C

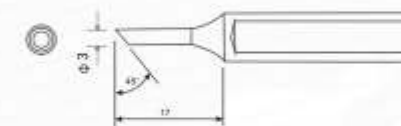


ST-936G-3C

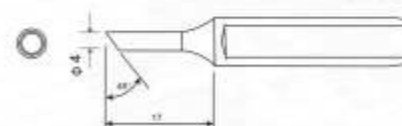


ST-936G-4C

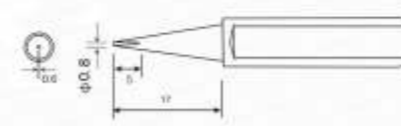


ST-936G-0.8D

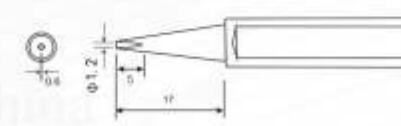


ST-936G-1.2D

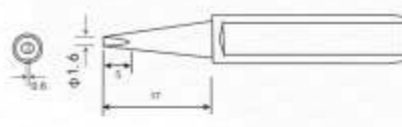


ST-936G-1.6D

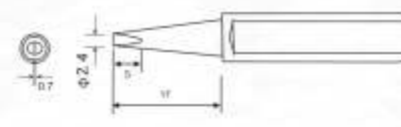


ST-936G-2.4D

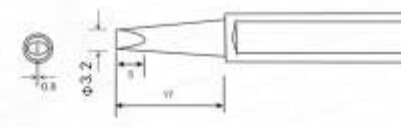


ST-936G-3.2D

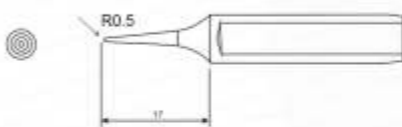


ST-936G-I

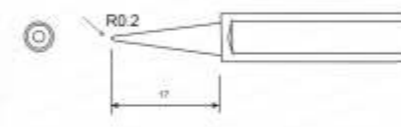


ST-936G-B

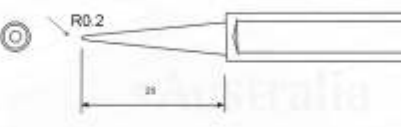


ST-936G-LB

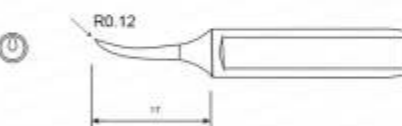

ST-936G-IS

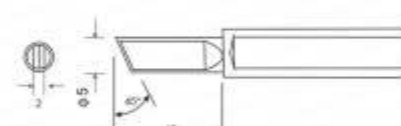

ST-936G-K

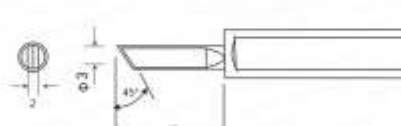

ST-936G-SK

900 Series of Black Sold Iron Head

>> PRODUCT FEATURES


- High quality anaerobic copper material, precise size, fast heat conduction;
- Easy to cover the tin, stable performance, smooth solder joints;
- Using advanced nanometer electroplating technology, it has anticorrosion and oxidation resistance.
- Special processing, suitable for lead-free soldering;
- Suitable for most 936 series soldering iron or welding table on the market;



900 Series Soldering Iron Head

>> PRODUCT SIZE

Soldering Iron Head Outside Diameter: $\phi 6.5$ Inner Diameter: $\phi 4.1$ Unit: mm
Packing Specification: 100 pcs/box or 10 pcs/box

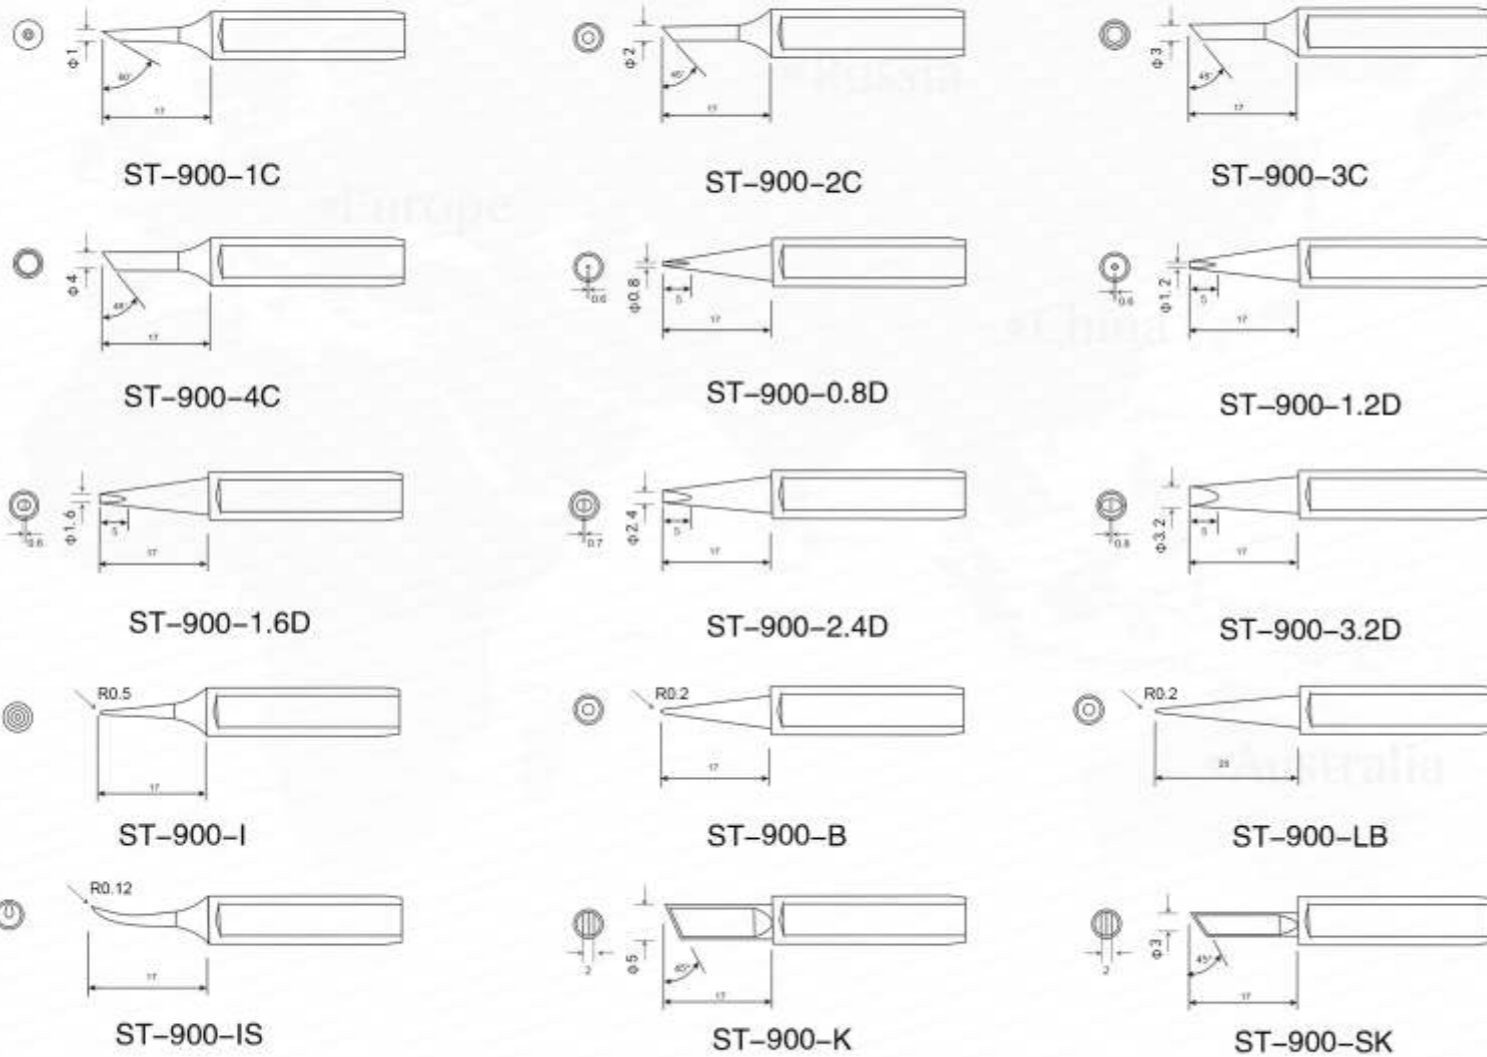

936G Series Golden Soldering Iron Head

>> PRODUCT FEATURES


- High quality anaerobic copper material, precise size, fast heat conduction;
- Easy to cover the tin, stable performance, smooth solder joints;
- Advanced nano-coating technology, anti-corrosion and oxidation resistance;
- Special processing, suitable for lead-free soldering;
- Suitable for most 936 series soldering iron or welding table.



936G Series Soldering Iron Head

>> PRODUCT SIZE

Soldering Iron Head Outside Diameter: $\phi 6.5$ Inner Diameter: $\phi 4.3$ Unit: mm
Packing Specification: 100 pcs/box or 10 pcs/box

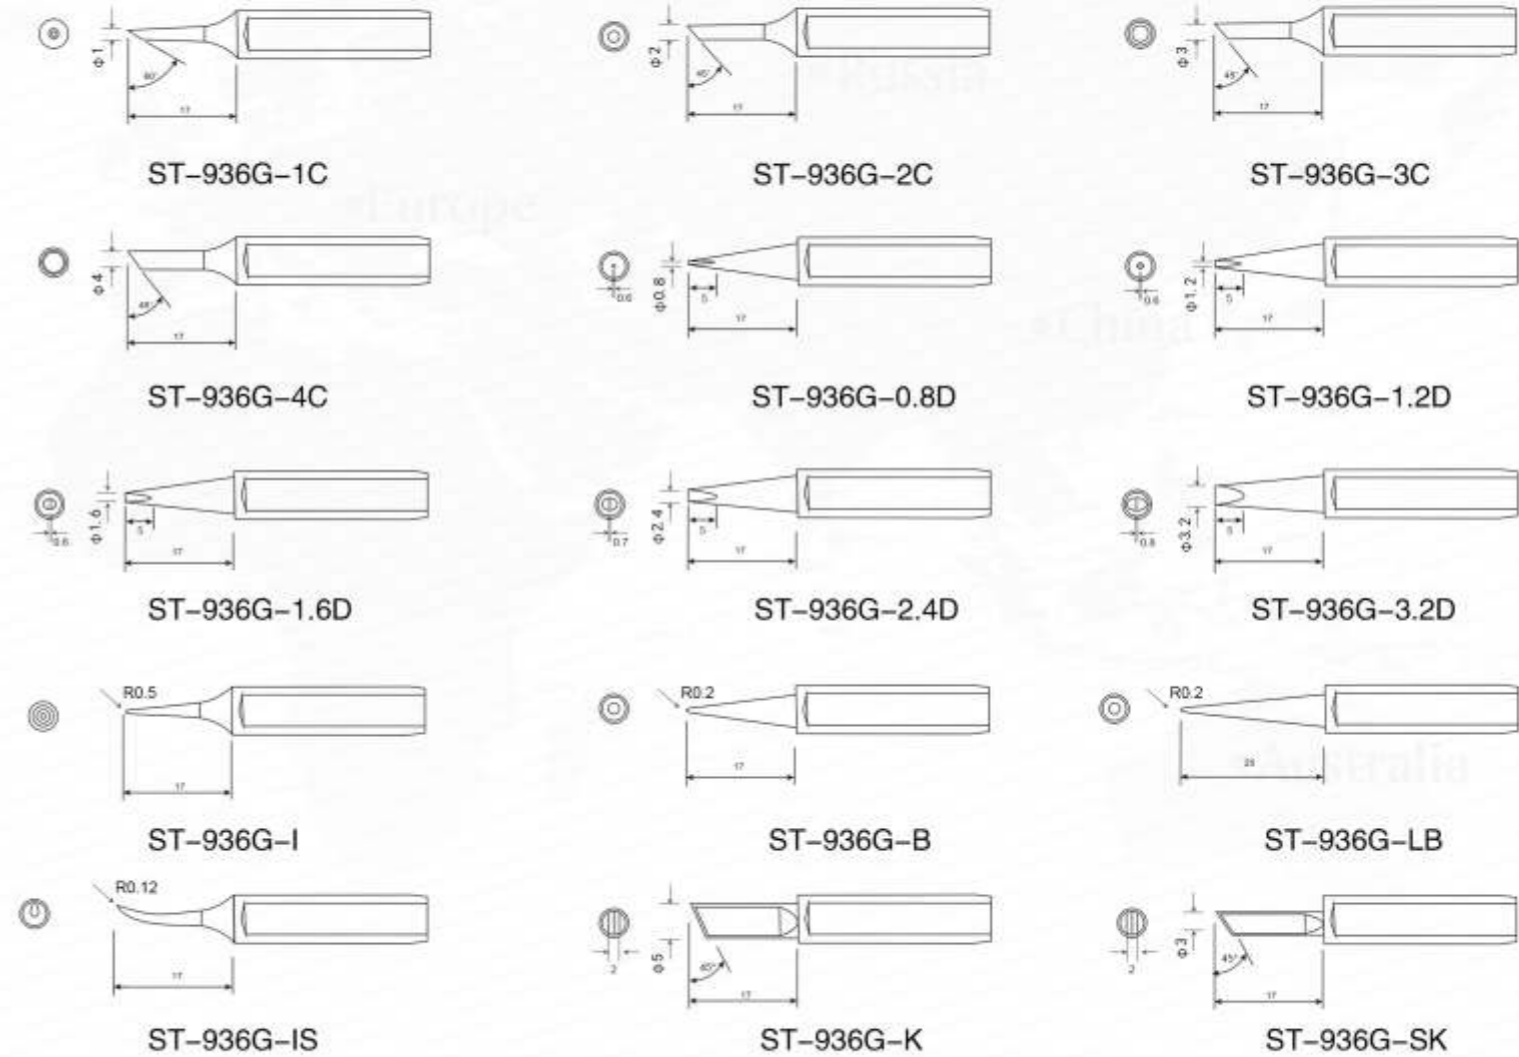

200 Series Soldering Iron Head

>> FEATURES


- High quality anaerobic copper material, precise size, fast heat conduction;
- Easy to cover the tin, stable performance, smooth solder joints;
- Using advanced nanometer electroplating technology, it has anticorrosion and oxidation resistance.
- Special processing, suitable for lead-free soldering;
- Suitable for most 200 series of high frequency welding sets on market;



200 Series Soldering Iron Head

>> PRODUCT SIZE

Soldering Iron Head Outside Diameter: $\phi 4.1$ Inner Diameter: $\phi 2$ Unit: mm
Packing Specification: 100 pcs/box or 10 pcs/box

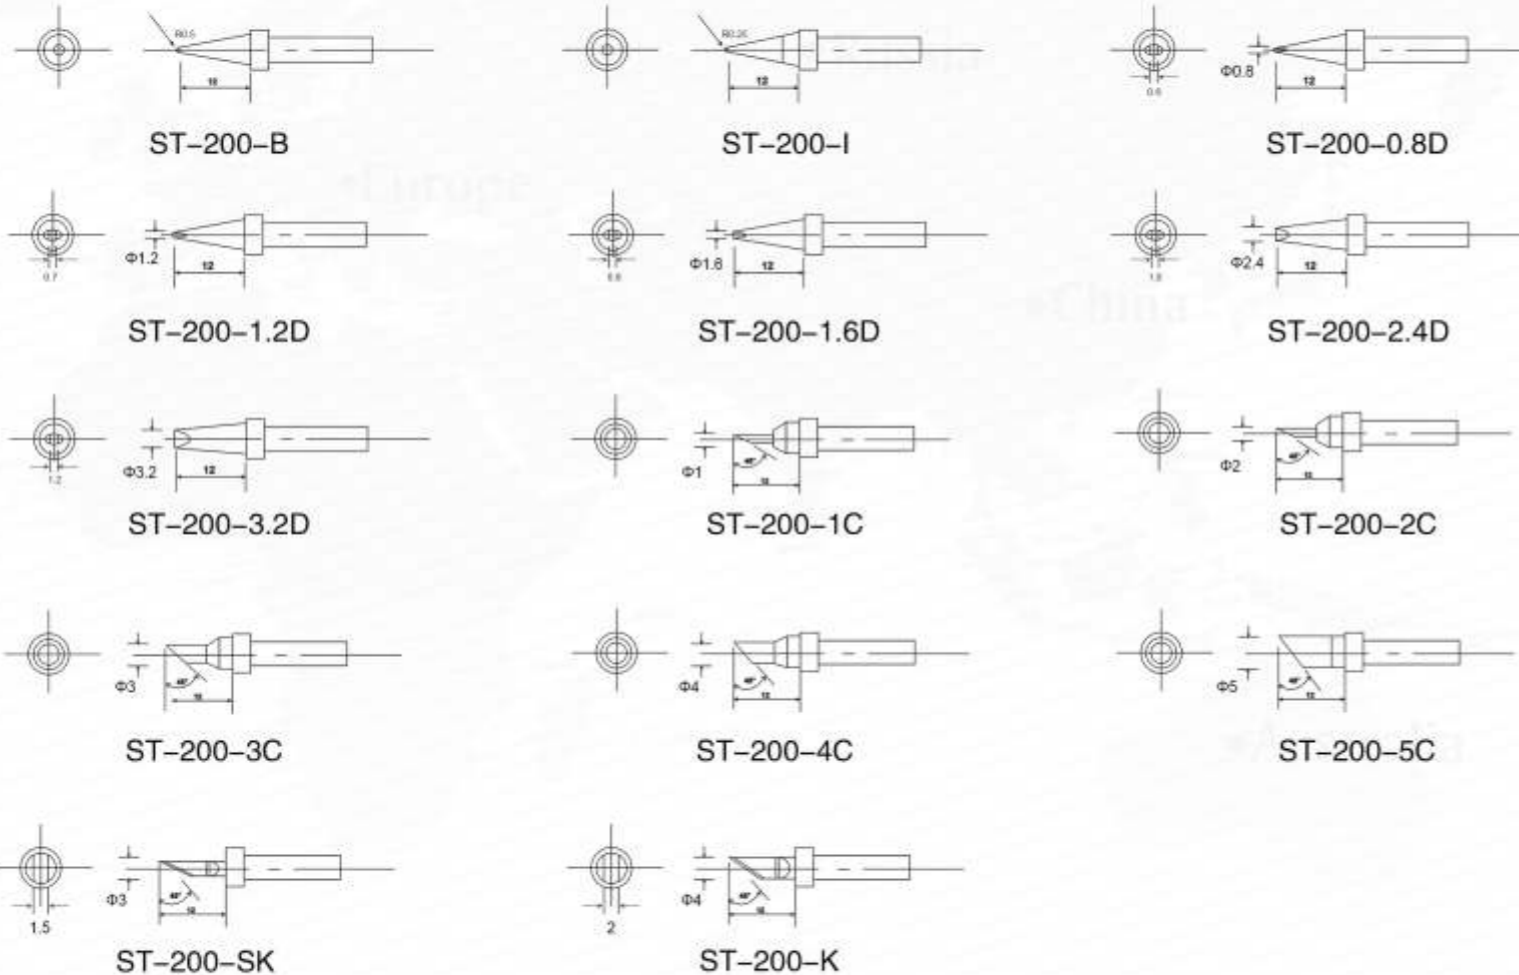

500 Series Soldering Iron Head

>> PRODUCT FEATURES


- High quality anaerobic copper material, precise size, fast heat conduction;
- Easy to cover the tin, stable performance, smooth solder joints;
- Using advanced nanometer electroplating technology, it has anticorrosion and oxidation resistance.
- Special processing, suitable for lead-free soldering;
- Applicable to most of the 205 series hf welding sets on the market.



500 Series Soldering Iron Head

>> PRODUCT SIZE

Soldering Iron Head Outside Diameter: $\phi 5.7$ Inner Diameter: $\phi 2.3$ Unit: mm
Packing Specification: 100 pcs/box or 10 pcs/box

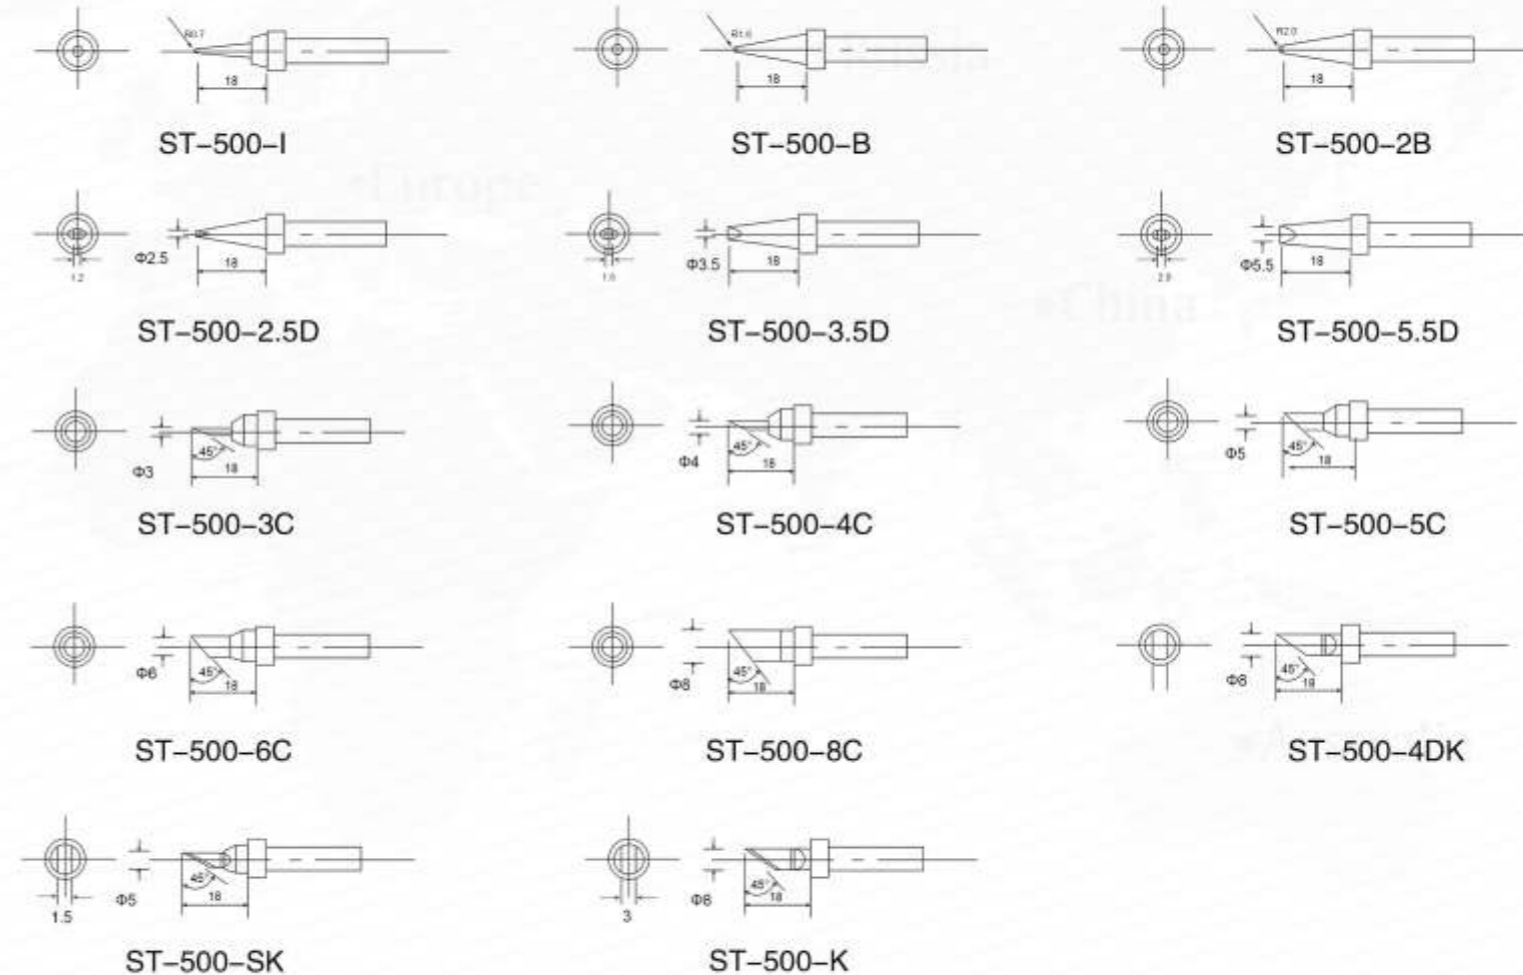

SS-906/907 Soldering Iron Handle

>> PRODUCT FEATURES

- Plug – in PTC ceramic heater, heating up quickly, easy to replace.
- Alloy soldering iron head, anti-oxidation, easy to tin, long life;
- Ergonomic handle design, comfortable grip.



Handle to the Interface



SS-906 Soldering Iron Handle

Model	Power	Heating Mode	Heater	Temperature	Welding Head	Soldering Iron	Handle Wire
SS-906	60W	Internal Heating	D1321	200-480°C	Alloy	190mm	1m

>> 产品特点

- Plug – in PTC ceramic heater, heating up quickly, easy to replace.
- Black gold soldering iron head, anti – oxidation, easy to cover the tin, long service life.
- High temperature resistant silicone wire, fire prevention, anti – hot, safety.



Handle to the Interface



SS-907 Soldering Iron Handle

Model	Power	Heating Mode	Heater	Temperature	Welding Head	Soldering Iron	Handle Wire
SS-907	60W	Internal Heating	B1321	200-500°C	Black Gold	190mm	1m

SS-203S/205S Soldering Station Handle

>> PRODUCT FEATURES

- Eddy current heating technology, constant temperature stability, temperature control and persistent;
- Plug – in heating core design, easy to replace;
- Alloy soldering iron head, anti-oxidation, easy to tin, long life;
- Ergonomic handle design, comfortable grip;



SS-203PH Heater



SS-2038 Solder Handle

Model	Power	Heating Mode	Heater	Temperature	Welding Head	Soldering Iron	Handle Wire
SS-203S	90W	Internal Heating	SS-203PH	200-600°C	Alloy	210mm	1.1m

>> PRODUCT FEATURES

- Eddy current heating technology, constant temperature stability, temperature control and persistent;
- Plug – in heating core design, easy to replace;
- Alloy soldering iron head, anti-oxidation, easy to cover the tin, long service life;
- High temperature resistant silicone wire, fireproof, anti-perm, safer;



SS-205PH Heater



SS-205S Solder Handle

Model	Power	Heating Mode	Heater	Temperature	Welding Head	Soldering Iron	Handle Wire
SS-205S	150W	Internal Heating	SS-205PH	200-600°C	Alloy	240mm	1.9m

850 Hot Wind Desoldering Station Heater、Handle

>> PRODUCT FEATURES

- Nickel–chrome wire heating core, heating even, rising rapidly;
- Plug – in design, easy to replace;
- With temperature protection device, safety and rest assured;



Model: SS-850H



>> PRODUCT FEATURES

- Diaphragm type air gun, air pump , rotating out of the wind
- It has the delay automatic cooling system, and the air gun is shut off.
- Ergonomic handle design, comfortable grip.



Model: SS-802

Air Pressure Gun Power	Pump Type	Air Volume	Air Gun Heating Core	Operating Temperature
700W	Diaphragm	24L/min	850H	100–480℃

LS914/916 Series Thermostat Iron

>> PRODUCT FEATURES

- Plug – in PTC ceramic heater, heating up quickly, easy to replace;
- Black gold soldering iron head, anti–oxidation, easy to cover the tin, long service life;
- High temperature resistant silicone wire, fireproof, anti–perm, safer;
- National standard triangle safety plug, safety operation;
- Anti–static design, two kinds of power optional;



LS914/916 Series Soldering Iron

>> PRODUCT DETAILS




High Temperature Resistant Silica Gel Wire



Black Gold Soldering Iron



Plug – in Heating Core

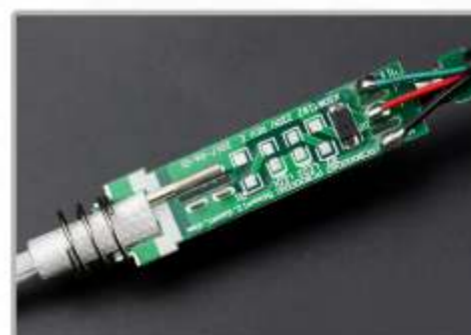

Double–sided Circuit Board



Power Cord Protective Cover



Welding Display

>> PRODUCT PARAMETERS

Model	Power	Heating Mode	Heater	Temperature Range	Preheating Time	Power Cord Length
LS914	40W	Internal Heating	LS914H	350–380℃	45s	1.3mm
LS916	60W	Internal Heating	LS916H	420–450℃	45s	1.3mm

LS905 Temperature Adjustable Electric Soldering Iron

>> PRODUCT FEATURES

- Rewinding mica town's heating core, heating up fast, long life;
- No oxygen copper black gold iron head, anti-oxidation, easy to cover the tin;
- Adjustable thermostat design, 200–450 °C temperature adjustable;
- Triangle plug, extra thick power cord, safety and rest assured;
- Transparent handle innovation design, fashionable and beautiful;



LS905 Electric Soldering Iron

>> PRODUCT DETAILS




No Oxygen Copper Black Gold Soldering Iron Head

Rewound Nickel-chrome Wire Heating Core

Temperature Adjusting Knob

>> PRODUCT INTERPRETATION

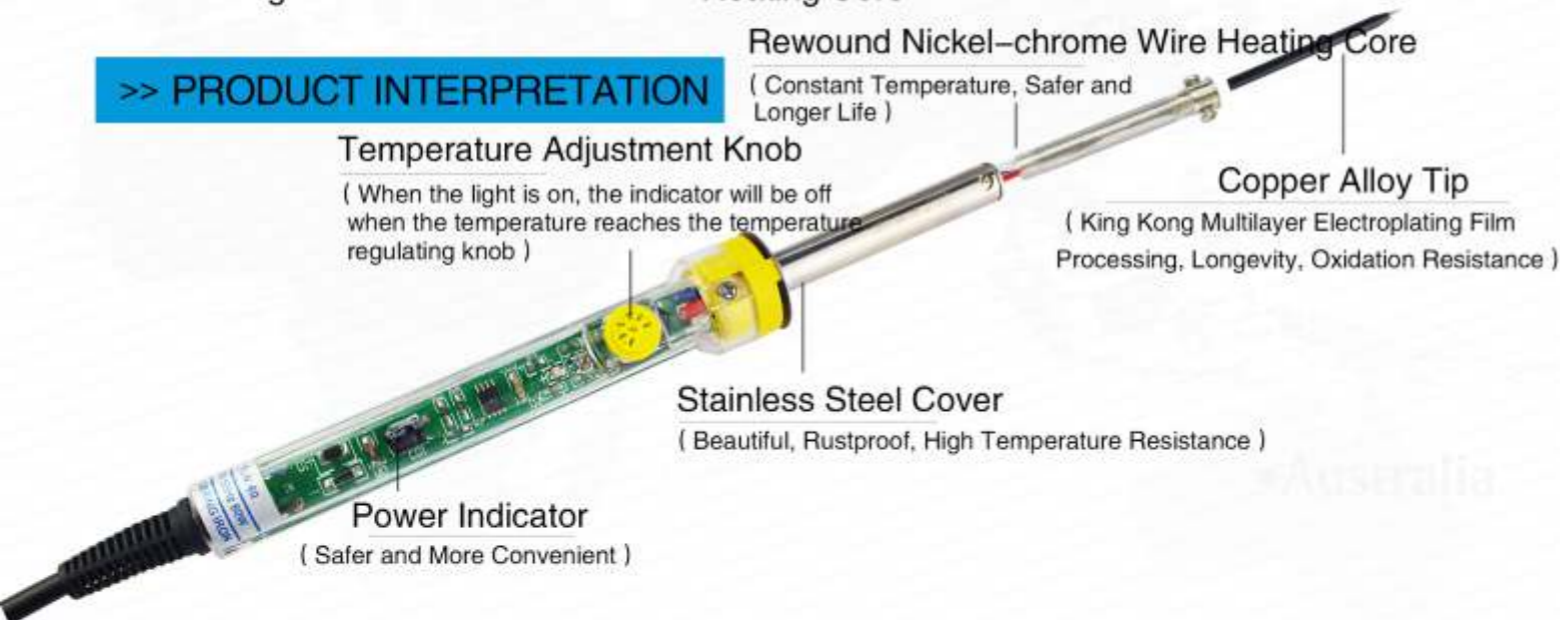

>> PRODUCT PARAMETERS

Model	Power	Heating Mode	Heater	Temperature Range	Input Voltage	Power cord length
LS905	60W	External Heated	LS905H	200–450°C	220V	1.3mm

LS630/640/650 Thermostat Iron

>> PRODUCT FEATURES

- Rewinding mica nickel chrome heater, heating fast, long life;
- No oxygen copper black gold iron head, anti-oxidation, easy to tin;
- External thermal power, the maximum temperature can rise to 620 C (LS650);
- The handle is equipped with indicator light, which can be observed at any time;
- Heat resistant material anti-slide handle, comfortable grip, improve working efficiency.



LS630/640/650 Electric Soldering Iron

>> PRODUCT DETAILS



No Oxygen Copper Black Gold Soldering Iron Head

Rewound Nickel-chrome Wire Heating Core

Heat-resistant and Anti-sliding Handle

>> PRODUCT INTERPRETATION



>> PRODUCT PARAMETERS

Model	Power	Heating Mode	Heater	Temperature	Input Voltage	Power Cord Length
LS630	30W	External heated	LS630H	500°C	220V	1.3mm
LS640	40W	External heated	LS640H	530°C	220V	1.3mm
LS650	50W	External heated	LS650H	620°C	220V	1.3mm

High Power Electric Soldering Iron with Light

>> PRODUCT FEATURES

- Rewinding mica town's heating core, heating up fast, long service life;
- Lead-free alloy iron head, anti-oxidation, easy to cover the tin;
- External thermal power, maximum power up to 300W(LS6300)
- The handle is equipped with indicator light, which can be observed at any time.
- A variety of power can be selected, applicable scope is wide.



High Power Electric Soldering Iron with Light

>> PRODUCT DETAILS



Lead-free Alloy Iron Head



Rewound Nickel-chrome Wire Heating Core



Bold Power Cord

>> PRODUCT PARAMETERS

Model	Power	Heating Mode	Heater	Specification of Soldering Iron Head	Iron Head Size	Length of the Soldering Iron
LS680	80W	External heated	LS680H	Shape tip	1.8mm	228mm
LS6100	100W	External heated	LS6100H	Shape tip	1.9mm	236mm
LS6150	150W	External heated	LS6150H	Wide tip	12mm	248mm
LS6200	200W	External heated	LS6200H	Wide tip	20mm	267mm
LS6300	300W	External heated	LS6300H	Wide tip	25mm	293mm

High Power Soldering Iron



LS575/5100/5150/5200/5300



LS5500

>> PRODUCT FEATURES

- High power ceramic heating core, fast conduction, long service life;
- High quality pure copper soldering iron head, heating fast, not easy to oxidize;
- Large displacement heat dissipation hole, heat dissipation fast, more durable;
- Wooden handle, environmental protection not conductive, safer;
- A variety of power can be selected, applicable range is wide.

>> PRODUCT DETAILS



Product Display



Pure Copper Soldering Iron Head



Large Displacement Ventilation Hole



Solid Wood Handle

>> PRODUCT PARAMETERS

Model	Power	Heating Mode	Heater	Specification of Soldering Iron Head	Iron Head Size	Length of the Soldering Iron
LS575	75W	External heated	LS575H	Wide Tip	12mm	155mm
LS5100	100W	External heated	LS5100H	Wide Tip	14mm	178mm
LS5150	150W	External heated	LS5150H	Wide Tip	17mm	285mm
LS5200	200W	External heated	LS5200H	Wide Tip	21mm	295mm
LS5300	300W	External heated	LS5300H	Wide Tip	28mm	330mm
LS5500	500W	External heated	LS5500H	Wide Tip	30mm	200mm

Plastic Welding Gun

>> PRODUCTS FEATURES

- High quality nichrome heater, fast heating collection, long life;
- Stepless thermostat, adjustable temperature range 50–550°C;
- Imported motor, uniform speed, strong power;
- Multi-step switch, wind speed can be quickly adjusted as needed;
- Wide range of applications, mostly used in industrial, assembly line, family and other places.



Plastic Welding Gun PT700

>> PRODUCTS DETAILS



Nichrome Heater



Imported Motor Fan



Stepless Thermostat Button



Tuyere



Wind Speed Adjustment Switch



Application Show

>> PRODUCT PARAMETERS

Type	Power Supply	Power	Temperature	Heater	Gas Flow	Weight
PT700C	220V	700W	50–500°C	PT700CH	50–300L/min	600g

Multipurpose Hot Melt Glue Gun



HM20/25

HM60/100/100S

HM120A/150A

>> PRODUCT FEATURES

- The gun body and structure are lightweight, the aluminum–plastic integrated gun–insulated heat insulation device, no extra glue come out, very comfortable to operate.
- The gun nozzle can adjust the flow rate, and it can be easily removed when the gun nozzle is blocked.
- Adapting to the electronic ceramic PTC, rapid temperature rise, glue fast melted, and fast operation.
- Using of FPM sealed, good sealing, not easy to leak glue;
- Multiple power specifications can be selected to improve operation efficiency.



Glue Gun Outlet



FPM Sealed



Temperature Adjust Button
(only for HM120A/150A)

>> PRODUCT PARAMETERS

Product Type	HM20	HM25	HM60	HM100	HM100S	HM120A	HM150A
Power	20W	25W	60W	100W	60/100W	120W	150W
Melting Temperature	190°C ± 10		220°C ± 10	230°C ± 10		100°C ~ 220°C	
Applicable Tape	7mm			11mm			
Length	130mm			190mm		197mm	
Height	110mm			158mm		162mm	

SD-A Series Electric Screwdriver

>> PRODUCT FEATURES

- Taiwan original imported motor, alloy gear, precision and durable;
- Innovative technology, torque 1 ~ 5kgf. Cm adjustable;
- Appearance patent design, light weight, comfortable grip;
- One – key reverse turn switch, single – hand operation is easier;
- Various specifications can be selected and applied widely.



SD-A Series Electric Screwdriver



Torsion Regulator



Power-saving Switch



Taiwan Original Imported Motor

>> PRODUCT PARAMETERS

Model	SD-A154	SD-A255	SD-A356	SD-A35S
Working Voltage(V)	DC18-36V	DC18-36V	DC18-36V	DC18-36V
Output Torque(kgf.cm)	1-15	2-25	3-35	3-35
No-load Speed(r.p.m)	1300	1400	1100	1100
Batch Head(mm)	4	5	6	6.35
Rated Power(W)	50	60	80	80
Weight(kg)	0.6	0.8	0.8	0.8
Suitable Type	Suitable for removing small screws such as calculator, mobile phone, navigator, small toy, etc.	It is suitable to remove some medium screws, such as desktop computer, LCD monitor, household kitchen appliances, low sound cannon, etc.	Suitable for removing large screws, such as refrigerator, washing machine, acoustics, air conditioning, lampblack machine, large electrical appliances, etc.	
Power Adapter	SP-A3615 or SPS-360			
Other Packages	Electric block SDR-1 / balancer SBA series/SB series.			

SD-C/D Series Semi/fully Automatic Electric Screwdriver

>> PRODUCT FEATURES

- Adopt DECHANG motor, alloy gear, precision and durable;
- Innovative technology, torque 2 ~ 35kgf. Cm adjustable;
- Appearance patent design, light weight, comfortable grip;
- One – key reverse turn switch, single – hand operation is easier.
- Semi/full automatic optional, wide range of applications;
- Equipped with power adaptor, convenient and quick;



SD-C/D Series of Electric Batches



Torsion Regulator



Power-saving Switch



Power Adapter



DECHANG Motor

SD-C series semi-automatic electric screwdriver
SD-D series fully automatic electric screwdriver

The difference between semi-automatic and full automatic?



Semi-automatic: after reaching the set torque, the clutch is separated, the motor is idle, and the screwdriver head is not referred to as semi-automatic electric batch.
Fully automatic: the starter which can automatically stop the motor after the torque is reached is called full automatic electric batch.

>> PRODUCT PARAMETERS

Model	SD-C154	SD-D154	SD-C255	SD-D255	SD-C356	SD-D356	SD-C35S	SD-D35S
Working Voltage(V)	AC220V 50HZ							
Types of Control	Semi-automatic	Fully Automatic	Semi-automatic	Fully Automatic	Semi-automatic	Fully Automatic	Semi-automatic	Fully Automatic
Output Torque(kgf.cm)	2-15		3-25		5-35		5-35	
No-load Speed(r.p.m)	1000-1400		1000-1500		700-1100		700-1100	
Batch Head(mm)	4		5		6		6.35	
Rated Power(W)	50		60		80		80	
Weight(kg)	0.6		0.8		0.8		0.8	
Suitable Type	Suitable for removing small screws such as calculator, mobile phone, navigator, small toy, etc.		It is suitable to remove some medium screws, such as desktop computer, LCD monitor, household kitchen appliances, low sound cannon, etc.		Suitable for removing large screws, such as refrigerator, washing machine, acoustics, air conditioning, lampblack machine, large electrical appliances, etc.			
Other Packages	Electric Block SDR-1 / Balancer SBA Series/SB Series							

SD-F Series In-line Electronic Screwdriver

>> PRODUCT FEATURES

- Adopt Taiwan's original imported motor, Alloy gear, precision and durable
- Innovative technology, torque 2-28kgf.cm could adjustable.
- Appearance patented design, light weight, comfortable grip
- One-button reversing switch makes it easier to operate with one hand
- A variety of specifications available, a wide range of applications
- 220V power in-line design, conveniently and quickly



SD-F Series Bits



Torque Regulator



Efficient Start-stop Switch



Taiwan Imported Motor

>> PRODUCT PARAMETERS

Model	SD-F205	SD-F286	SD-F28S
Working Voltage(V)	AC220V 50HZ		
Output Torque(kgf.cm)	2-20	3-28	3-28
No-load Speed(r.p.m)	1000	900	900
Batch Head(mm)	5	6	6.35
Rated Power(W)	80	80	80
Weight(kg)	0.8	0.8	0.8
Suitable Type	Suitable for removing some medium screws, such as desktop computers, LCD monitors, home kitchen appliances, subwoofers, etc.	Suitable for removing large screws, such as refrigerator, washing machine, acoustics, air conditioning, lampblack machine, large electrical appliances, etc.	
Other Packages	Electric Seat SDR-1/Balancer SBA Series/SB Series		

Automatic Screw Feeder



SF-1050



SF-1050D



SF-1050R

>> PRODUCT FEATURES

- The track is free to adjust, such as the standard screw of M1. O-m5.0 (limited to 1050/10500)
- The counting function automatically alarms and circulates, with the digital panel at a glance (limited to 10500)
- When the material is divided, if there is any obstacle, it will automatically return to the origin to ensure the accuracy of the picking position (1050R);
- Suitable for various round head screws, with gasket screws and thin head screws;
- Take the screw port, no vibration, pick up the screw stable and fast;
- Feeding and vibration drive independent control, can set the time delay time;
- Provide the external signal line, and the automatic equipment can know whether there are screws in the pickup position according to the signal line.



SF-1050/1050D Guide Rail



SF-1050R Guide Rail(Not Adjustable)



Rate Adjustable

>> PRODUCT PARAMETERS

Model	SF-1050	SF-1050D(Counting Money)	SF-1050R
Screw Head	Suitable for various types of screws (maximum L=20mm)		Suitable for various types of screws (maximum L=10/15mm)
Apply to Screw	Screw diameter 1.0-5.0mm (adjustable)		Fixed 1.5/1.8/2.0/2.3/2.5/3.0/2.5/3.0 mm (Not Adjustable)
Output Speed	2pcs/s		1pcs/s ± 0.35
Input Voltage	AC220V 50Hz		
Product Size	180 X 125 X 150mm (L X W X H)		206 X 149 X 122mm (L X W X H)
Net Weight	About 2.5kg		About 3.0kg

SBA Series Balancer

>> PRODUCT FEATURES

- ☐ Suitable for installation in all kinds of production line, maintenance workbench, etc;
- ☐ Applicable to all kinds of electric screwdrivers and pneumatic screwdrivers;
- ☐ The tension adjustment range is 0.5–5.0kg, and the stretching range of the rope is 0–1.2m.



SBA Series Balancer



>> PRODUCT PARAMETERS

Model	SBA-15	SBA-20	SBA-30	SBA-50
Bear Weight	0.5kg–1.5kg	0.6kg–2.0kg	1.5kg–3.0kg	3.0kg–5.0kg
Length Contraction	1.3m			

Balancer SB1.2 2.0 3.0

>> PRODUCT FEATURES

- ☐ Suitable for installation in all kinds of production line, maintenance workbench, etc.
- ☐ Applicable to all kinds of electric screwdrivers and pneumatic screwdrivers;
- ☐ Tension adjustment range 0.5–3. Kg, stretching range 0–2.0m.



BILANCIATORE Balancer

>> PRODUCT DETAILS



Metal Rings



Positioning Clamp



Force Adjustment Knob

>> PRODUCT PARAMETERS



Model Type	Load Capacity		Collapsing Length
	KGS	LBS	
SB1.2	0.5–1.2	1.1–2.6	2.0m
SB2.0	0.5–2.0	1.1–4.4	
SB3.0	0.6–3.0	1.3–6.6	

SB Series Balancer

>> PRODUCT FEATURES

- Suitable for installation in all kinds of production line, maintenance workbench, etc;
- Applicable to all kinds of electric screwdrivers and pneumatic screwdrivers;
- The tension adjustment range is 0.5-5.0kg, and the stretching range of the rope is 0-1.2m.



SB Series Balancer



Positioning Clamp



Hook



Pensile Point

Fixed Tablet

Tension Control Knob

>> PRODUCT PARAMETERS

Model	SB-1200	SB-2000	SB-3000	SB-5000
Bear Weight	0.5kg-1.5kg	0.6kg-2.0kg	1.5kg-3.0kg	3.0kg-5.0kg
Length Contraction	1.2m			

Electric Screwdriver Power Supply SP-A3615

>> PRODUCT FEATURES

- Convenient to carry, little space taking
- Design towards one, stepless speed regulation;
- Together use with the electric screw drive, can improve work efficiency.



SP-A3615

>> PRODUCT PARAMETERS

Model: SP-A3615
The Power Cord: 1.1m
Input: AC240V 50/60HZ 1.0A
Output: DC24-36V Continuously Adjustable 1.5A

Indicator Light

Stepless Speed Regulation



Electric Screwdriver Power Supply SP-36

>> PRODUCT FEATURES

- High power, can extend the service life of power;
- Simple structure and convenient operation;
- Design and improve efficiency.
- Three block adjustment, according to the work need to switch quickly.

>> PRODUCT PARAMETERS

Model: SPS-360
Rated Power: 60W
Output Voltage: 18V 24V 36V
Output the Number: Dual Output



91mm


160mm

SPS-360

Electric Screwdriver Soket



SDR-1

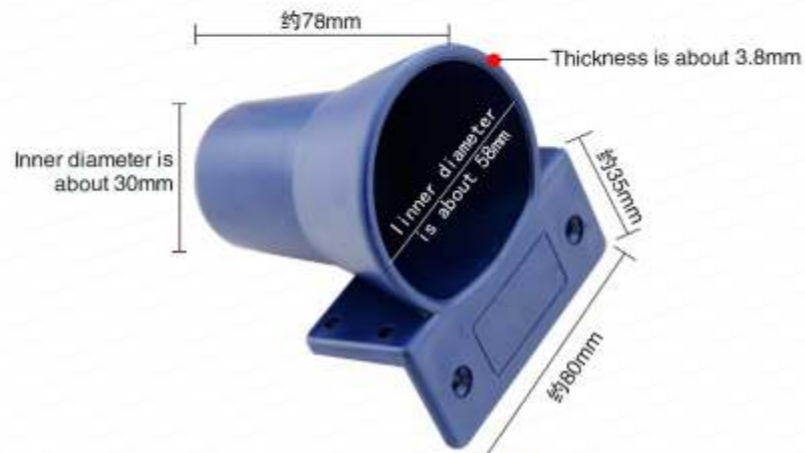

Application


>> PRODUCT FEATURES

- Made of high quality materials, economical and practical.
- Use with power batch to improve work efficiency.
- Suitable for placement of electric screwdriver.

Magnetizer and Demagnetizer MDA-3



SDA-3

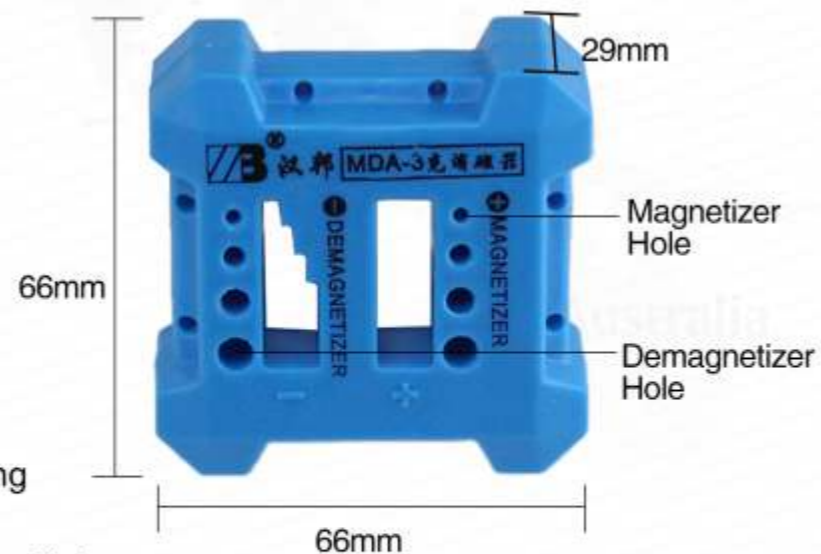

>> PRODUCT FEATURES

- High density magnetic block with strong magnetic properties.
- Use with power batch to improve work efficiency.
- It is mainly used for the magnetization and demagnetization of screwdriver or electric screwdriver

Diagonal Pliers Outlet Forceps

>> PRODUCT FEATURES

- High quality chromium vanadium steel manufacturing, high frequency pawn, sharp and durable;
- The rear spring design, the operation saves time and effort, improves the efficiency;
- The hardness of HRC can reach 54-62;
- High quality PVC handle, ergonomic design;
- A variety of specifications to choose from, the good helper of work.



Diagonal Pliers Outlet Forceps

>> PRODUCT SIZE



>> PRODUCT PARAMETERS

Name	Model	Size (mm)	Cutting Range (mm)			
			Soft Copper Wire	Soft Iron Wire	Engineering plastics/resin	Ordinary plastic /PVC/ PP soft materials
Diagonal Pliers	PM-A05	125 (5 inch)	2.0	1.6		
Outlet Forceps	PM-725	125 (5 inch)	2.0	1.6	4.0	5.0
Outlet Forceps	PM-726	150 (6 inch)	2.0	1.6	5.0	6.0

Industrial Grade Electronic Scissors


>> PRODUCT FEATURES

- High – quality alloy steel manufacturing, high – frequency: pawn, sharp and durable;
- Springback spring design, operation save time and effort, improve efficiency;
- High quality PVC handle, ergonomic design; A variety of specifications to choose from, the good helper of work;



Industrial Grade Electronic Scissors

>> PRODUCT SIZE

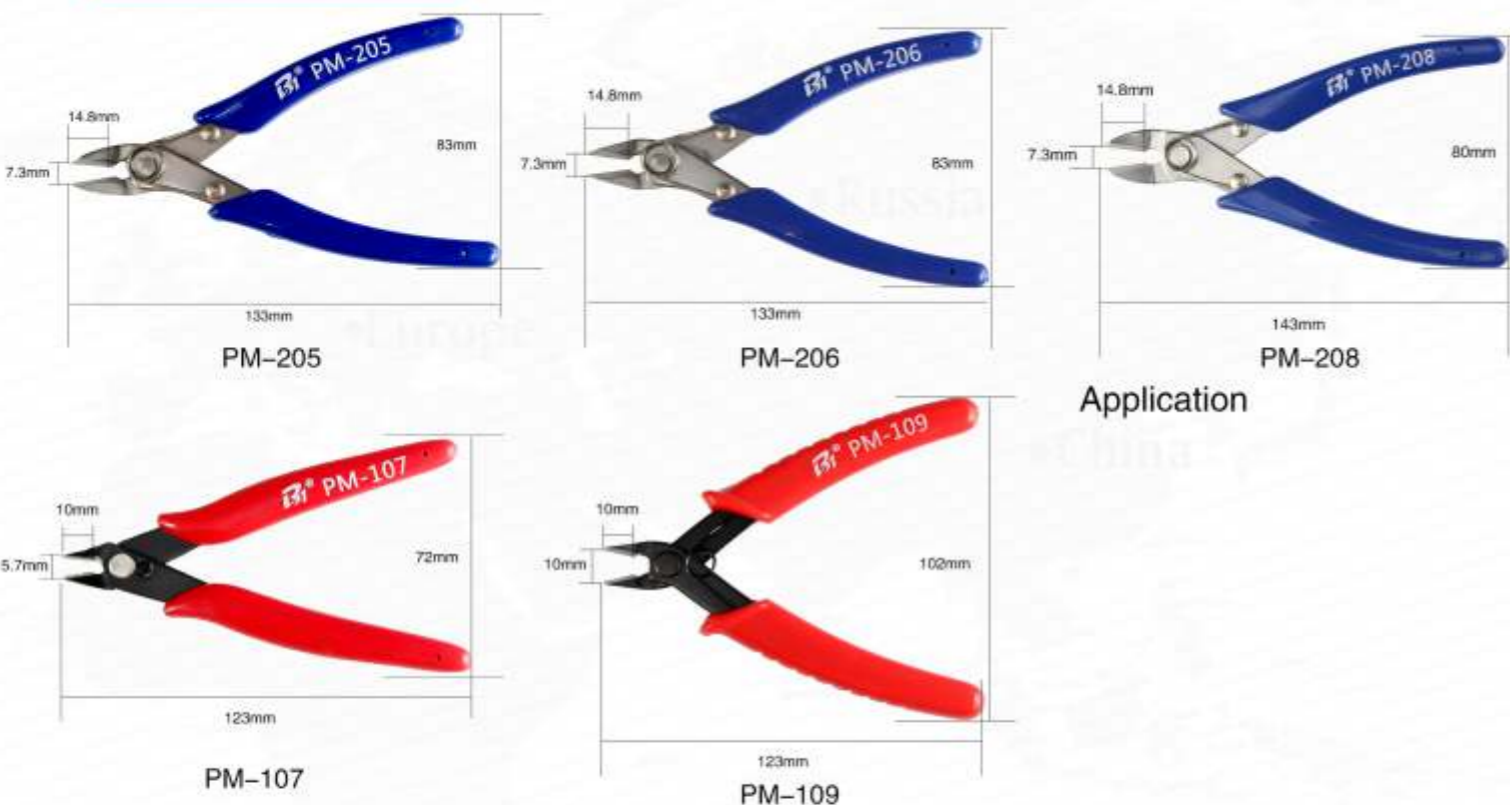

Application

>> PRODUCT PARAMETERS

Model	Material	Overall Length	Edge Opening	Mouth Length	Cutting Copper-wire Range
PM-205	AISI420J2	133mm	7.3mm	14.8mm	1.6mm
PM-206	AISI420J2	133mm	7.3mm	14.8mm	1.6mm
PM-208	AISI420J2	143mm	7.3mm	14.8mm	1.8mm
PM-107	Mn65	123mm	5.7mm	10mm	1.3mm
PM-109	Mn65	123mm	10mm	10mm	1.3mm

Multi-functional Wire Stripping Pliers S9-080

>> PRODUCT FEATURES

- Multi-functional stripping, can strip a variety of wire, convenient and quick;
- Strip length can be adjusted to improve work efficiency;
- Sharp cutting edge, strong and durable;
- The wire pulling force can be adjusted to avoid damaging the wire;
- Comfortable grip, suitable for long operation;



Multi-functional Wire Stripping Pliers

>> PRODUCT DETAILS



Multi-function Stripping Mouth



Sharp Cutting Mouth



Tension Control Knob

>> PRODUCT PARAMETERS

	Wire Stripping Range	Wire Cutting Range
Single Core Wire	0.2~3.3mm ²	0.08~2.0mm ²
Multi-strand Wire	0.2~5.5mm ²	0.09~3.5mm ²
Ribbon Cable	0.2~3.5mm ²	8mm (max)
Characteristics	<ul style="list-style-type: none"> Adjustable stripping tension, suitable for different thickness insulation outer layer, not damage copper core. The length of the stripping adjustment range is 2mm~20mm. Can strip 8mm wide flat wire. Novel design, strip cut relaxed. 	



Welding Tools SA-612


>> PRODUCT FEATURES

- Used for PCB circuit correction, scraping corrosion, oxidation layer, etc;
- Remove tin balls from soldering tin and remove rust spots;
- Disassemble the components on the circuit board and repair them;
- Widely used for welding, assembling and repairing of circuit board.



Welding Tools

>> PRODUCT INTRODUCTION

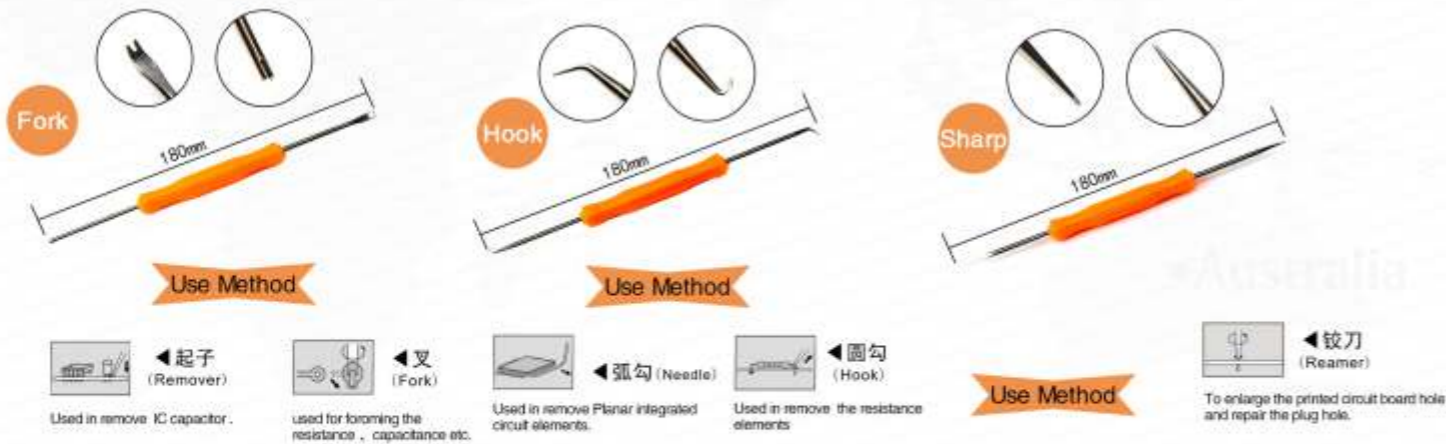

DS-108 Solder Sucker



DS-108



DS-108ESD (Anti-static)

>> FEATURE

- Made of high strength ABS material, strong and durable;
- The suction nozzle of high temperature nylon material is not easy to age.
- Air leakage protection device, good air tightness, strong suction;
- Using lengthening design, the suction is bigger;
- Anti-static design (DS-108ESD), safer operation;



Application

>> DETAILS



High Temperature Suction Nozzle



Air Leakage Protection Device



Toggle Button

>> PRODUCT PARAMETERS

Model	Specifications	Material	Color	Leakage Protection	Anti-static
DS-108	330*48mm	ABSPlastic + nylon	Blue	Air Tight Ring	NO
DS-108ESD	330*48mm	PPlastic + nylon	Black	Air Tight Ring	YES

DS-366 Series Solder Sucker



DS-366



DS-366A

>> PRODUCT FEATURES

- It is made of high strength ABS/PC material and durable.
- The suction nozzle of high temperature nylon material is not easy to age.
- Double ring leakage protection device, good air tightness, strong suction;
- Anti-slip sponge suit, comfortable grip, suitable for long time operation;
- The two models are available in a wide range of applications.



Application

>> PRODUCT DETAILS



High Temperature Suction Nozzle



Double Ring Leakage Protection



Non-slip Sponge Suit

>> PRODUCT PARAMETERS

Model	Specifications	Material	Color	Leakage Protection
DS-366	205*30mm	ABS Plastic + Nylon	Black	Double Loop
DS-366A	205*30mm	PC Plastic + Nylon	Green	Double Loop


High Temperature Insulation Pad



S-110



S-120

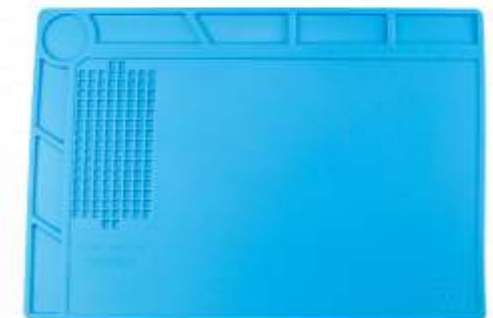


S-130




S-140



S-150

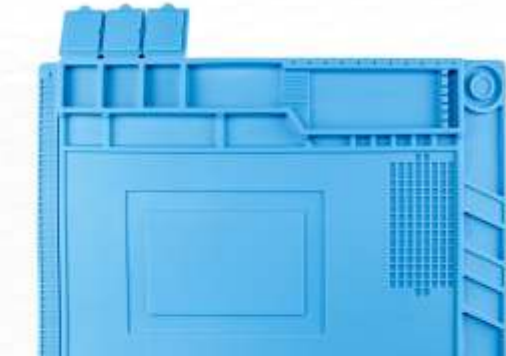

S-160

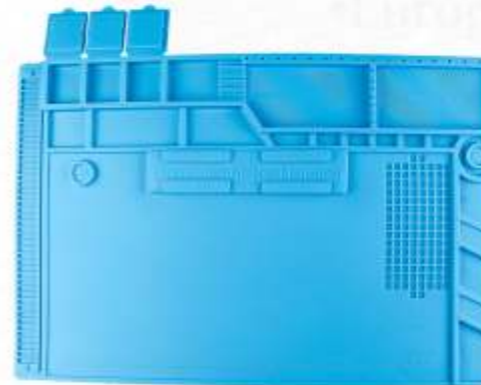

S-170

>> PRODUCT FEATURES

- The insulation pad is made of high temperature resistant silica gel. Fire prevention, anti-perm;
- Heavy design, strong and durable, safe and secure.
- The parts are classified and placed, and the required parts can be quickly identified.
- Multiple specifications can be selected for a variety of job requirements.

>> PRODUCT PARAMETERS

Model	Length	Width	Thickness	Magnetic	Bearable Temperature
S-110	280mm	200mm	3mm	NO	500°C
S-120	340mm	230mm	3mm	NO	
S-130	350mm	250mm	3mm	NO	
S-140	350mm	250mm	3mm	YES	
S-150	389mm	269mm	4mm	YES	
S-160	450m m	300mm	4mm	YES	
S-170	480m m	318mm	4mm	YSE	

Soldering Iron Nozzle Cleaner

>> PRODUCT FEATURES

- Replace the traditional seepage sponge;
- No need to add water, avoid the soldering iron head to cool down, will not erupt tin beads;
- It is effective to prevent iron head oxidation and increase the service life of soldering iron head;
- Ball top design, tin slag will not splash on the workbench, keep the work environment clean;
- When the soldering iron head is inserted into the metal, multi-point contact to achieve a multi-point cleaning.



Soldering Iron Nozzle Cleaner

>> PRODUCT SIZE



When the iron head is inserted into the metal wire. It will multi-touch to achieve multi-point cleaning. The effect is remarkable. And it is widely used in soldering iron head cleaning field.

Antistatic Wrist Strap



WS-101



WS-102



WS-103



WS-201



WS-202




WS-203

>> DESCRIPTION



A Point: Surface Screws

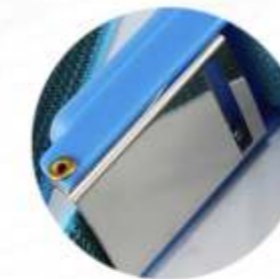

B Point: Bottom Stainless Steel



C point: Conductive Rubber Bands with Inner Surface of the Wrist Band

The resistance R between A and B:	$1M\Omega < R < 10M\Omega$
The resistance R between A and B:	$1M\Omega < R < 10M\Omega$
The resistance R between A and B:	$100\Omega < R < 10M\Omega$